


ORDERING INFORMATION

Order code: 62922
 Description: BHPS0070/TRITAP/C/HX/H/K/STD
 UPC: 69549629226

SPECIFICATIONS

Ballast type: Magnetic high pressure sodium
 Ballast style: Core and coil
 Circuit type: HX-HPF
 ANSI code: S62
 Input voltage (V): 120/277/347
 Input frequency (Hz): 60
 Line volt regulation: 10 %
 Line watt regulation: Within trapezoid
 Insulation class: H (180)

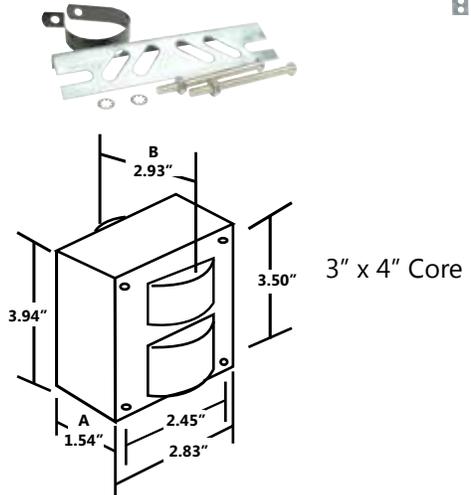

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	0.80	1.50	0.75	70	91	120	90	C	2	0.60 - 0.95	0.90	-20°F / -30°C
277	0.35	0.65	0.30	70	91	120	206	C	1	0.30 - 0.45	0.90	-20°F / -30°C
347	0.30	0.55	0.25	70	91	120	263	C	1	0.20 - 0.35	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	110 - 130
Short circuit:	1.80 - 2.25

BALLAST DIMENSIONS


Dimension A:	1.54"
Dimension B:	2.93"
Lead lengths:	12" - 14"
Weight (lbs) :	5.51

WIRING DIAGRAM


Ground ballast core

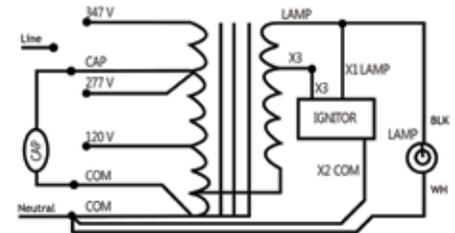

BRACKET

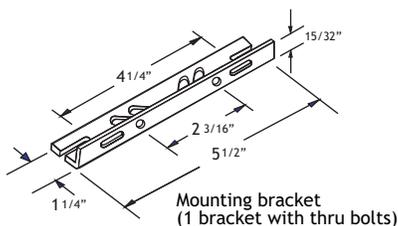

CAPACITOR

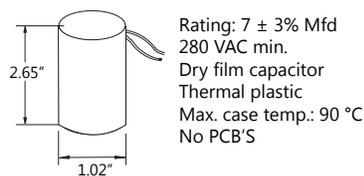

IGNITOR

