


ORDERING INFORMATION

Order code: 10065
Description: BMH1000/120/208/240/C/CWI/H/K/
UPC: 69549100657

SPECIFICATIONS

Ballast type: Magnetic metal halide
Ballast style: Core and coil
Circuit type: CWI
ANSI code: M47
Input voltage (V): 120/208/240
Input frequency (Hz): 60
Line volt regulation: $\pm 10\%$
Line watt regulation: $\pm 10\%$
Insulation class: H (180°)

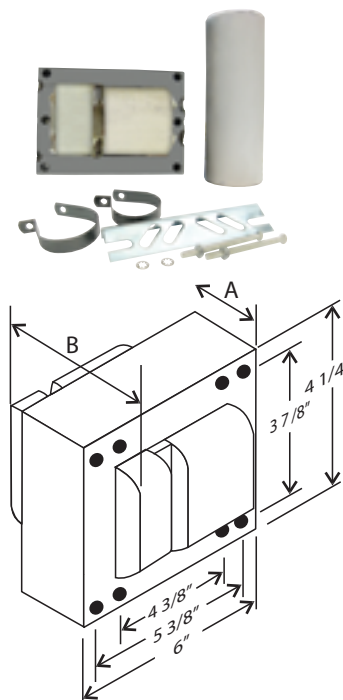

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	9.60	6.05	4.05	1 000	1 080	410	74	C	20	3.20 - 4.37	0.90	-20°F / -30°C
208	5.54	3.55	2.35	1 000	1 080	410	125	C	15	1.83 - 2.55	0.90	-20°F / -30°C
240	4.80	3.07	2.05	1 000	1 080	410	315	C	12	1.55 - 2.20	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	375 - 460
Short circuit:	5.20 - 6.00

BALLAST DIMENSIONS


Dimension A:	4.50"
Dimension B:	6.40"
Lead Lengths:	12.00"
Weight (lbs):	33.00

WIRING DIAGRAM

Ground ballast core

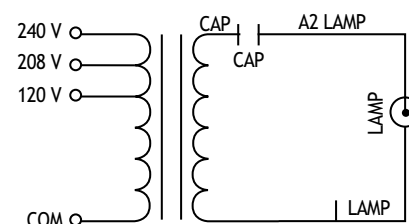

BRACKET

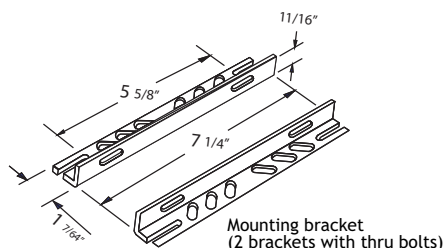

CAPACITOR

