



project name	type
catalog number	voltage
approved by	date

VANLX LENEXA VANITY FIXTURE

The VANLX Lenexa Vanity light is a stylish cylinder-shaped light ideal for vanities, restrooms, hallways, hospitality, and multi-family residential applications. With field-selectable CCT, the VANLX allows you to easily select the right color temperature for your application.



FEATURES AND BENEFITS

PERFORMANCE

- Field-selectable CCT for simplified SKU management and field customization.
 - ColorSET – 3 CCT settings (2700K/3000K/4000K)
- Input voltage: 120V
- Lumen packages: 2,100 – 4,000 lumens
- Available in 2', 3', and 4' lengths.
- Durable steel body with nickel trim, and polycarbonate lens.
- Technical performance:
 - CRI >90
 - Efficacy up to 75 LPW
 - Rated Life L70 > 35,000 hours
 - Power Factor: >0.9
 - THD: <20%
 - Surge Protection: 4kV included
 - Ambient operating temperature: -4°F to 104°F (-20°C to 40°C)

INSTALLATION

- Can be installed in either the vertical or horizontal orientation.

CONTROLS

- 0-10V dimming, dim to off

APPLICATIONS

- Hospitality
- Multi-family residential
- Hallways
- Restrooms

AVAILABLE MODELS

ORDER CODE	MODEL	WATTS (W)	COLOR TEMPERATURE (CCT)	LUMEN OUTPUT (lm)	VOLTAGE (VAC)	NOMINAL SIZE
11369	VANLX2-210-28W-9CCT3-120D-NI	28W	2700/3000/4000K	2,100 lm	120	2 ft
11370	VANLX3-300-40W-9CCT3-120D-NI	40W	2700/3000/4000K	3,000 lm	120	3 ft
11371	VANLX4-400-56W-9CCT3-120D-NI	56W	2700/3000/4000K	4,000 lm	120	4 ft




ORDERING GUIDE

MODEL CONFIGURATOR						
MODEL	LENGTH	WATTS	COLOR TEMPERATURE	VOLTAGE	DIMMING	TRIM
VANLX			9FCCT3	120	D	NI
VANLX	2-210 - 2'	PS28 - 28W	9CCT3 - 90+ CRI, ColorSET (2700/3000/4000K)	120 - 120V	D - 0-10V Dimming	NI - Nickel
	3-300 - 3'	PS40 - 40W				
	4-400 - 4'	PS56 - 56W				

FLUORESCENT GUIDE


FLUORESCENT	VANLX WATTS (W)	LUMEN OUTPUT (lm)	INPUT VOLTAGE(VAC)	NAME
2x 17 Watt Fluorescent	28W	2,100 lm	120V	VANLX2-210-28W-9CCT3-120D-NI
2x 25 Watt Fluorescent	40W	3,000 lm	120V	VANLX3-300-40W-9CCT3-120D-NI
2x 32 Watt Fluorescent	56W	4,000 lm	120V	VANLX4-400-56W-9CCT3-120D-NI

PRODUCT DIMENSIONS

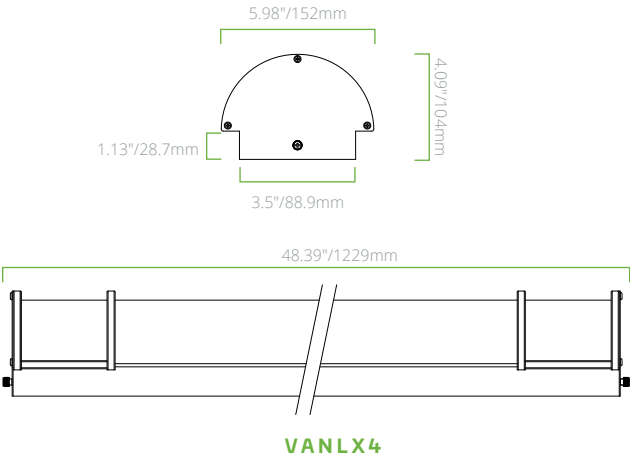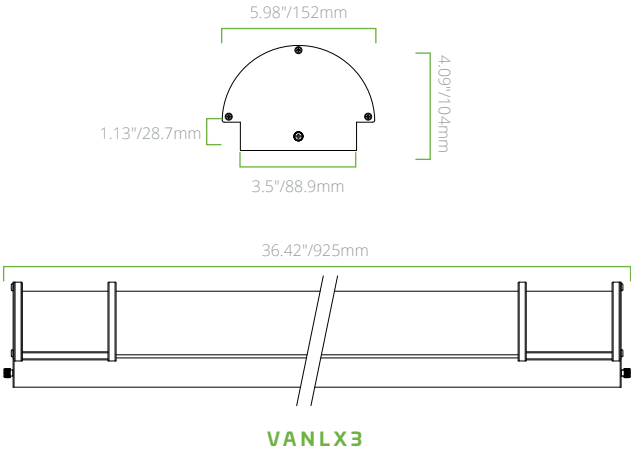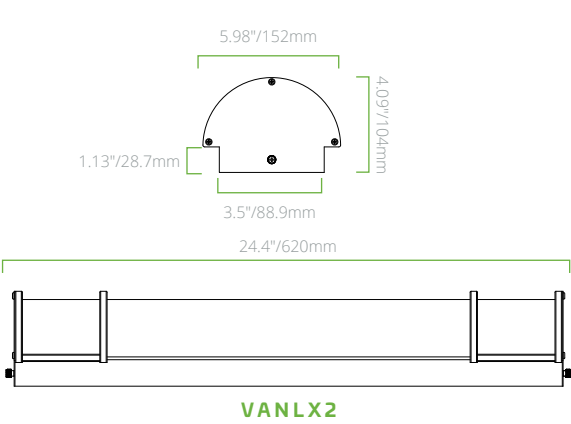


VANLX2-210-28W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	176.26	8.4%
0-30	376.84	18.1%
0-40	624.29	29.9%
0-60	1152.65	55.2%
0-80	1571.51	75.3%
0-90	1713.26	82.1%
90-180	374.34	17.9%
0-180	2087.6	100%



VANLX3-300-40W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	269.63	9.0%
0-30	576.40	19.3%
0-40	953.64	31.9%
0-60	1745.57	58.4%
0-80	2338.58	78.3%
0-90	2421.23	84.4%
90-180	465.66	15.6%
0-180	2986.89	100%



VANLX4-400-56W-9CCT3-120

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-20	363.14	9.0%
0-30	776.48	19.2%
0-40	1284.98	31.7%
0-60	2354.25	58.1%
0-80	3159.95	78.0%
0-90	3410.81	84.2%
90-180	641.19	15.8%
0-180	4052.00	100%

