



PRODUCT
CODE(S):

NOTES:

TYPE:

Interactive PDF. Click to type.

VNL Vanity Lights

Power and 5CCT Selectable | 120-277V

Ideal for both residential and commercial settings, the VNL Vanity Light can be mounted horizontally or vertically and adds a refined touch to bathrooms, hallways, and any space that benefits from a stylish lighting solution!

Available in Black
& Brushed Nickel

Power Selectable

3 power settings per fixture

5CCT Selectable

2700K / 3000K / 3500K / 4000K / 5000K

Dual-Mount

Use as Vanity or Wall Sconce,
mounted vertically or horizontally

Durable Steel Construction

0-10V / ELV / TRIAC Dimmable

120-277V Driver

Smooth, Uniform Illumination

Square ends



2' Model

3' Model

Included in Box:
Surface Mount Bracket



LIGHT SPECIFICATIONS AND ELECTRICAL



PRODUCT CODE	SELECTABLE WATTS	CCT	LUMENS	EFFICACY	V	CRI	FACTORY SETTINGS	MAX CURRENT
VNL-2S-19W-3P-5CCT-LV-BK VNL-2S-19W-3P-5CCT-LV-BN	9W	2700K	820 lm	91 lm/W	120-277V	90+	19W 3000K	0.18A
		3000K	850 lm	94 lm/W				
		3500K	900 lm	100 lm/W				
		4000K	920 lm	102 lm/W				
		5000K	950 lm	106 lm/W				
	15W	2700K	1350 lm	90 lm/W				
		3000K	1400 lm	93 lm/W				
		3500K	1450 lm	97 lm/W				
		4000K	1500 lm	100 lm/W				
		5000K	1500 lm	100 lm/W				
	19W	2700K	1650 lm	87 lm/W				
		3000K	1750 lm	92 lm/W				
		3500K	1800 lm	95 lm/W				
		4000K	1850 lm	97 lm/W				
		5000K	1850 lm	97 lm/W				
VNL-3S-30W-3P-5CCT-LV-BK VNL-3S-30W-3P-5CCT-LV-BN	18W	2700K	1650 lm	92 lm/W	120-277V	90+	30W 3000K	0.28A
		3000K	1700 lm	94 lm/W				
		3500K	1750 lm	97 lm/W				
		4000K	1800 lm	100 lm/W				
		5000K	1900 lm	106 lm/W				
	23W	2700K	2050 lm	89 lm/W				
		3000K	2100 lm	91 lm/W				
		3500K	2150 lm	93 lm/W				
		4000K	2200 lm	96 lm/W				
		5000K	2300 lm	100 lm/W				
	30W	2700K	2550 lm	85 lm/W				
		3000K	2600 lm	87 lm/W				
		3500K	2700 lm	90 lm/W				
		4000K	2800 lm	93 lm/W				
		5000K	2900 lm	97 lm/W				

SPECIFICATIONS & ELECTRICAL

Surge Protection	2.5kV
Power Factor	>0.9
THD	<25%
Operating Temp	-20°C to 40°C
Beam Angle	135°
Dimmable	0-10V (120-277V) / ELV/TRIAC (120V)
L70 Life	>50,000 hrs
Warranty	5-year

COMPATIBLE DIMMERS - 2' & 3'

BRAND	MODEL NO.	CONTROL TYPE
Leviton	IP710-DLZ	0-10V
Lithonia/Synergy	ISD BC 120/277 WH	0-10V
Cooper	SF10P-W	0-10V
Lutron	DVSTV-WH	0-10V
HUBBELL	PSD710	0-10V
HUBBELL	RSD710Z	0-10V
Lutron	S2-LH	TRIAC
Lutron	DV-600P	TRIAC
Lutron	DV-603P-LA	TRIAC
Lutron	CT-603P(R)-WH	TRIAC
Legrand	HCL453PTCCCV6	TRIAC
Synergy/Leviton	ISD 600 120 / IPI06	TRIAC
Leviton	6633-PA	TRIAC
Leviton	6613-PLW	TRIAC
Leviton	IPL06-10Z	TRIAC
Leviton	6674-P0W	TRIAC
Leviton	6613-PLA	TRIAC (MLV)
Lutron	NLV-600-WH	TRIAC (MLV)
Lutron	DVELV-300P-AL	ELV
Lutron	NTELV-300-WH	ELV
Lutron	SELV-300-WH	ELV
Insteon	2477D	ELV
HUBBELL	RSDE06	ELV
Lutron	PD-5NE	ELV/TRIAC

APPROVALS & RATINGS

cETL	5010283
CAN ICES-005	Yes
Damp Location	Yes
IP Rating	IP20

CONSTRUCTION

Housing	Steel
Lens	Polycarbonate
Finish	Black - Powder Coated Brushed Nickel - Electroplate
Finish Colour	Black or Brushed Nickel
Mounting Type	Surface Mount

COMPATIBLE DIMMERS - 2' ONLY


BRAND	MODEL NO.	CONTROL TYPE
Leviton	DSM10-1LZ	TRIAC (MLV)

COMPATIBLE DIMMERS - 3' ONLY


BRAND	MODEL NO.	CONTROL TYPE
Lutron	CTCL-153P-WH	TRIAC
Lutron	DVCL-153P	TRIAC
Lutron	PD-6WCL	TRIAC

MEASUREMENTS (IN) & WEIGHTS (LBS)

2' Model

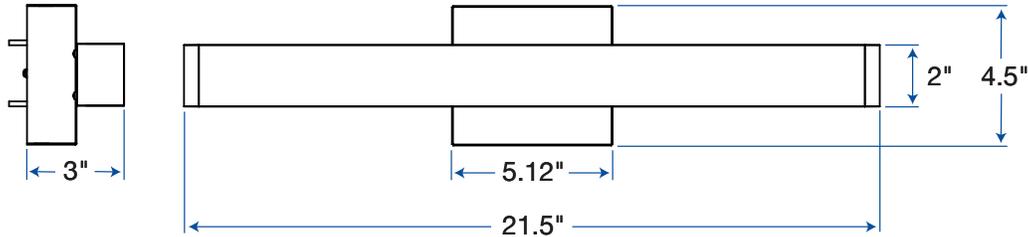

3' Model

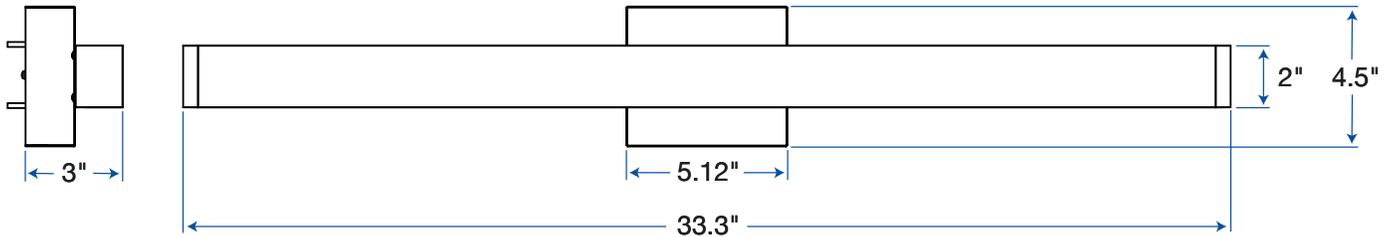

VNL-2S-19W-3P-5CCT-LV-BK
VNL-2S-19W-3P-5CCT-LV-BN

Product Meas.	21.5" x 2" x 3"
Fixture Weight	1.94 lbs
Carton Qty	1
Carton G.W.	2.2 lbs
Carton Meas.	22.05" x 3.46" x 4.8"
Master Carton Qty	6
Master Carton G.W.	14.95 lbs
Master Carton Meas.	22.6" x 11.1" x 10.55"

VNL-3S-30W-3P-5CCT-LV-BK
VNL-3S-30W-3P-5CCT-LV-BN

Product Meas.	33.3" x 2" x 3"
Fixture Weight	2.39 lbs
Carton Qty	1
Carton G.W.	2.77 lbs
Carton Meas.	33.86" x 3.46" x 4.8"
Master Carton Qty	6
Master Carton G.W.	18.93 lbs
Master Carton Meas.	34.41" x 11.1" x 10.55"

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE, Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833