

ORDERING INFORMATION

Order code: 65489
 Description: F28T8/41K/8/RS/G13/STD ESV LL
 UPC: 69549654891
 Case quantity: 25




Nominal length : 48 in. (915 mm) Dia. : 1 in. (26 mm)


PERFORMANCE DATA

Shape: T8
 Base: G13 (Med Bipin)
 Starting method: Rapid Start (RS)
 Wattage (W): 28
 Colour temperature (K): 4 100
 CRI: 85
 Rated life on IS¹ ballast:
 Based on a 3 hour start 36 000
 Based on a 12 hour start 40 000
 Rated life on PS/PRS¹ ballast:
 Based on a 3 hour start 55 000
 Based on a 12 hour start 60 000
 Initial lumens (lm): 2 700
 Mean lumens (lm): 2 637
 Nominal efficiency (lm/W): 96
 TCLP compliant: Yes
 Phosphor composition: Triphosphor
 Nominal lamp operating frequency (Hz): 60
² Minimum starting temperature (°C): -10

DIMENSIONS

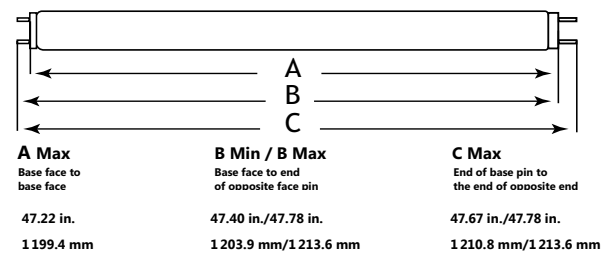

SPECTRAL DISTRIBUTION

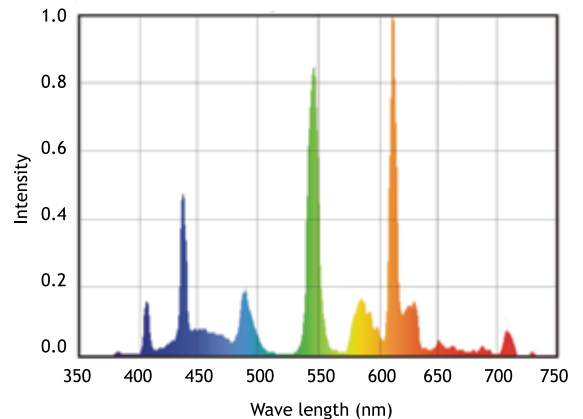

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 long life ballast.



OUTDOOR



INDOOR



3 YEARS WARRANTY



TCLP COMPLIANT



RECYCLABLE



ENERGY SAVING



ONE YEAR WARRANTY



Means this bulb meets federal minimum efficiency standards.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

February 21, 2017

STANDARD