

CWP05 Wall Pack

Power and 3CCT Selectable | 120-347V

Meet the successor to our best-selling CWP04 Wall Packs!
Ideal for entryway and exterior security lighting. Easy installation and
maintenance with colour temperature and voltage options

Power Selectable

3 power settings per fixture

3CCT Selectable

3000K / 4000K / 5000K

Borosilicate Glass Lens

Built-in Photocell

unplug to bypass

120-347V

Universal Driver

0-10V dimming

Motion Sensor Compatible

sold separately

Optional Wire Guard and Visor

sold separately



LIGHT SPECIFICATIONS AND ELECTRICAL



PRODUCT CODE	SELECTABLE WATTS	CCT	LUMENS	EFFICACY	V	CRI	FACTORY SETTINGS	MAX CURRENT
CWP05-40W-3P-3CCT-UD	20W	3000K	3054 lm	153 lm/W	120-347V	81	40W 4000K Photocell: ON	0.4A
		4000K	3170 lm	159 lm/W				
		5000K	3244 lm	162 lm/W				
	30W	3000K	4433 lm	148 lm/W				
		4000K	4646 lm	155 lm/W				
		5000K	6280 lm	209 lm/W				
	40W	3000K	5967 lm	141 lm/W				
		4000K	6280 lm	157 lm/W				
		5000K	5994 lm	150 lm/W				
CWP05-60W-3P-3CCT-UD	30W	3000K	4926 lm	164 lm/W	120-347V	81	60W 4000K Photocell: ON	0.6A
		4000K	5117 lm	171 lm/W				
		5000K	5229 lm	174 lm/W				
	40W	3000K	6143 lm	154 lm/W				
		4000K	6433 lm	161 lm/W				
		5000K	6542 lm	164 lm/W				
	60W	3000K	8349 lm	139 lm/W				
		4000K	8819 lm	140 lm/W				
		5000K	8641 lm	144 lm/W				
CWP05-80W-3P-3CCT-UD	45W	3000K	7027 lm	156 lm/W	120-347V	80	80W 4000K Photocell: ON	0.8A
		4000K	7324 lm	163 lm/W				
		5000K	7460 lm	166 lm/W				
	60W	3000K	9027 lm	150 lm/W				
		4000K	9496 lm	158 lm/W				
		5000K	9606 lm	160 lm/W				
	80W	3000K	11386 lm	135 lm/W				
		4000K	12077 lm	151 lm/W				
		5000K	11584 lm	145 lm/W				
CWP05-120W-3P-3CCT-UD	80W	3000K	12097 lm	151 lm/W	120-347V	82	120W 4000K Photocell: ON	1.2A
		4000K	12581 lm	157 lm/W				
		5000K	12177 lm	152 lm/W				
	100W	3000K	14771 lm	148 lm/W				
		4000K	15831 lm	158 lm/W				
		5000K	15486 lm	155 lm/W				
	120W	3000K	17193 lm	140 lm/W				
		4000K	17966 lm	150 lm/W				
		5000K	17508 lm	146 lm/W				

TECHNICAL DATA



SPECIFICATIONS & ELECTRICAL

Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C
Distribution	105°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Borosilicate Glass
Finish	Powder Coated
Finish Colour	Bronze


APPROVALS & LISTINGS

cUL	E482965
IP Rating	IP65
IK Rating	IK05

DIMENSIONS AND WEIGHTS

Fixture Weight	7.5 lbs
Fixture Dimensions	14.2 x 8.6 x 6.5 in
Carton Qty	1
Carton Weight	9.9 lbs
Carton Dimensions	16.1 x 11.4 x 9.4 in

DIMENSIONAL DRAWINGS (IN)

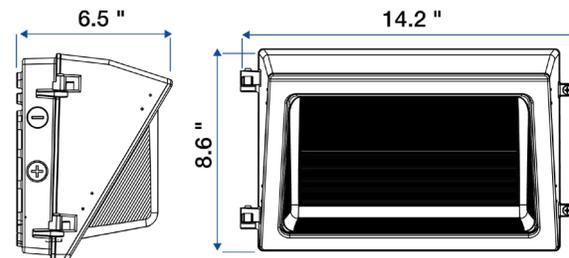

DLC INFORMATION

PRODUCT CODE	PRIMARY USE	DLC ID	CLASSIFICATION
CWP05-40W-3P-3CCT-UD	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	S-FW3HF9	Premium
CWP05-60W-3P-3CCT-UD	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	S-CJP80P	Premium
CWP05-80W-3P-3CCT-UD	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	S-L71Z8W	Premium
CWP05-120W-3P-3CCT-UD	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	S-SXRYRC	Premium

ACCESSORIES (Sold Separately)

		SHADED CELLS INDICATE COMPATIBILITY			
PRODUCT NUMBER	PRODUCT NAME	40W	60W	80W	120W
CWP05-WG	Wire Guard				
CWP05-VISOR	Visor				
HB01DMS-C*	Motion Sensor				
MS04-RC	Motion Sensor Remote				

*MS04-RC is required for the Motion Sensor to function

BRITISH COLUMBIA

1140-2375 Fremont St, Port Coquitlam,
BC V3B 0N9 | (778) 730-0448

ALBERTA

13-2355 52 Ave SE, Calgary, AB
T2C 4X7 | (403) 907-0212

ONTARIO

8-540 Jamieson Pkwy, Cambridge, ON
N3C 0G5 | (519) 880-9833