

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED REFLECTORS

CHOICE

GU5.3

ORDERING INFORMATION

Order code: 70264
Model number: MR16/S4/12V/7W/27K/40/CHOICE/STD
UPC: 069549033320
Case quantity: 24

PHYSICAL DATA


Dimensions: MOL: 49.7 mm (2")
 DIA: 50 mm (1 32/32")
Shape: MR16
Base: GU5.3
Finish: Lens: Frosted

PERFORMANCE DATA

Watts (W):	7	Beam angle (°):	40°
Traditional equivalent (W):	50	CBCP (cd):	976
Volts (V AC/DC):	12	Power factor:	≥0.7
Color temperature (K)¹:	2 700	Input Current (mA):	650
Lumen output (lm)²:	500	Frequency (Hz):	60
Efficacy (lm/W):	71	Lens material:	Plastic
CRI:	80	Housing Material:	Aluminum, Plastic
Dimmable	Yes	Application:	Indoor
Life L70 (h)³:	25 000	Operating temp. range:	-40 °C / -40 °F to 45 °C / 113 °F

¹ Typical colour temperature range: +/- 5 %.
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

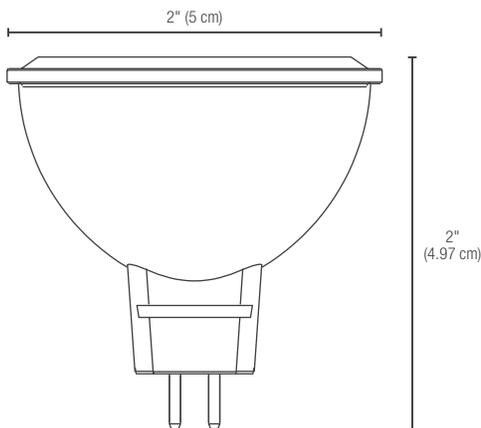

3^{yrs}
warranty

dimmable

damp location

ICES 005

not suitable for enclosed fixture

RoHS

UL CERTIFIED

FC

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.