

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED REFLECTORS

CHOICE PAR30SN

ORDERING INFORMATION

Order code: 70257
Model number: P30S/S3/11W/40K/40/CHOICE/STD
UPC: 069549033252
Case quantity: 6

PHYSICAL DATA

Dimensions: MOL: 92 mm (3 5/8")
 DIA: 95 mm (3 3/4")
Shape: PAR30SN
Base: E26
Finish: Lens: Clear


PERFORMANCE DATA

Watts (W):	11	Beam angle (°):	40°
Traditional equivalent (W):	75	CBCP (cd):	1 581
Volts (V AC/DC):	120	Power factor:	0.7
Color temperature (K)¹:	4 000	Input Current (mA):	130
Lumen output (lm)²:	800	Frequency (Hz):	60
Efficacy (lm/W):	70	Lens material:	Plastic
CRI:	90	Housing Material:	Plastic
Dimmable:	Yes	Application:	Indoor
Life L70 (h)³:	25 000	Operating temp. range:	-40 °C / -40 °F to 45 °C / 113 °F

¹ Typical colour temperature range: +/- 5 %.
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.



DIMENSIONS

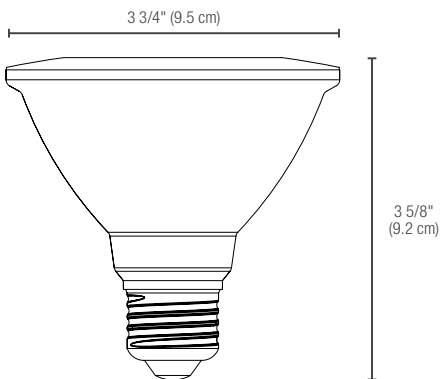

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	HCL453P, DVCL-153P, CTCL-153P
COOPER	DAL06P*
LEVITON	6615*

* Flickering may occur on low intensity.
¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.
 Dimming performance might be impacted when using the above dimmers with only one lamp. Full performance achieved when using two or more lamps.

3 ^{yr's}
warranty

dimmable

damp location

enclosed fixture

ICES 005

RoHS

UL CERTIFIED

FCC

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.