

Date: _____ Project: _____

Type: _____ Part #: _____



Orion

Beam Adjustable UFO Highbay

UFO highbays are ideal for replacing HID High Bay fixtures, offering high performance and long life. Designed precision spherical and convex lens and offers low brightness, uniform illumination and high efficiency LED platform.

Now enhanced with BeamFlex™ adjustable beam optics. Designed with easy installation of sensors at the face of the fixture.



Product Features

- DLC Premium Pending
- BeamFlex™: Adjustable switch for beam angles (60°/90°/120°)
- Includes 10' cord, ring bolt mounting accessory & safety hanging kit
- Mounting options: hook/chain, pole pendent and surface mounting
- 3.5mm Jack for optional sensor installation
- Powder-Coated die-cast aluminum housing available in black or white finish (R3 is Black only)
- Custom painting is available
- Polycarbonate Lens
- Built-in 6KVA Surge Protection
- Operating temperature: -40°F to +104°F (-40°C to +40°C)
- Suitable for wet locations IP65 rated
- Rated Lifespan: L70 ~100,000 hrs
- 10 year limited warranty

Specifications

Voltage	120–347V AC
Wattage	R1: 80/100/120/160W R2: 120/160/200/250W R3: 250/280/300/320W
Efficacy	up to 200 lm/W
Lumens	up to 56,039 lm
Selectable CCT	3500K, 4000K, 5000K
CRI	>70
Beam Angle	Selectable 60° / 90° / 120°
Dimming	0-10V
Power Factor	>0.9
Mounting	Surface, Pendant, Suspended
Applications	Commercial, Industrial, Warehouse, Retail Facilities
Certifications	CETLUS, DLC Premium, NSF, IP65

Specifications

Order #	Model #	Voltage	Wattage	Delivered Lumens	CCT	Efficacy
R34231	RENO-HBU-160W-DV-MCCT-ABA-R1-BK	120-347V	80/100/120/160W	up to 27,883 lm	35/40/5000K	up to 200 lm/W
R34232	RENO-HBU-160W-DV-MCCT-ABA-R1-WH	120-347V	80/100/120/160W	up to 27,883 lm	35/40/5000K	up to 200 lm/W
R34233	RENO-HBU-250W-DV-MCCT-ABA-R2-BK	120-347V	120/160/200/250W	up to 43,768 lm	35/40/5000K	up to 200 lm/W
R34234	RENO-HBU-250W-DV-MCCT-ABA-R2-WH	120-347V	120/160/200/250W	up to 43,768 lm	35/40/5000K	up to 200 lm/W
R34235	RENO-HBU-320W-DV-MCCT-ABA-R3-BK	120-347V	250/280/300/320W	up to 56,039 lm	35/40/5000K	up to 184 lm/W


DLC Information

Order #	Model #	Application	DLC Standard	DLC Premium
R34231	RENO-HBU-160W-DV-MCCT-ABA-R1-BK	High-Bay Luminaires for Commercial / Industrial Buildings	–	Pending
R34232	RENO-HBU-160W-DV-MCCT-ABA-R1-WH	High-Bay Luminaires for Commercial / Industrial Buildings	–	Pending
R34233	RENO-HBU-250W-DV-MCCT-ABA-R2-BK	High-Bay Luminaires for Commercial / Industrial Buildings	–	Pending
R34234	RENO-HBU-250W-DV-MCCT-ABA-R2-WH	High-Bay Luminaires for Commercial / Industrial Buildings	–	Pending
R34235	RENO-HBU-320W-DV-MCCT-ABA-R3-BK	High-Bay Luminaires for Commercial / Industrial Buildings	–	Pending

BeamFlex™


RENO Optical Technology Platform

BeamFlex™ is Reno Lighting's proprietary optical technology platform providing field-selectable beam distribution integrated within the luminaire. Beam angles are adjustable on site during installation or commissioning, eliminating the need for factory-specified fixed optics or post-installation optic replacement.

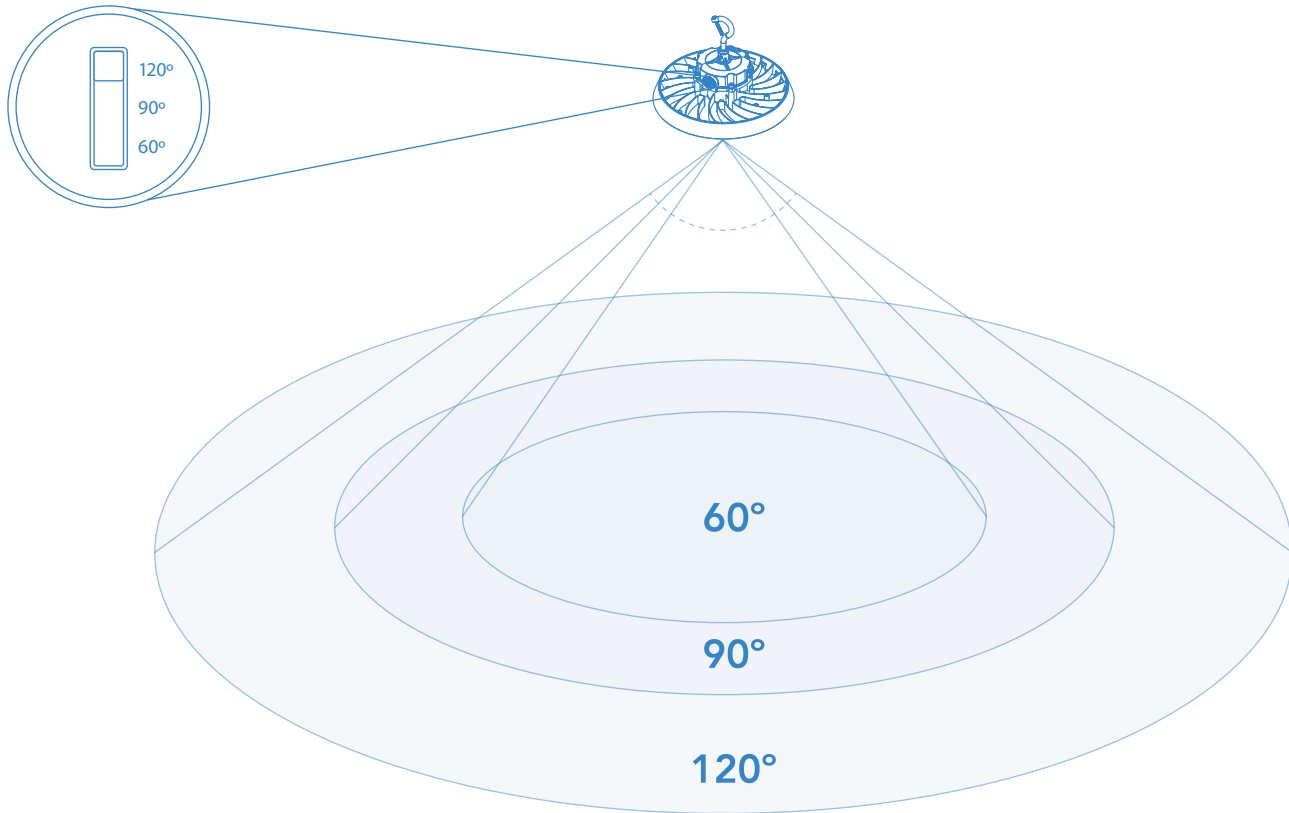

Photometrics R1

160W 5000K 90° Beam angle

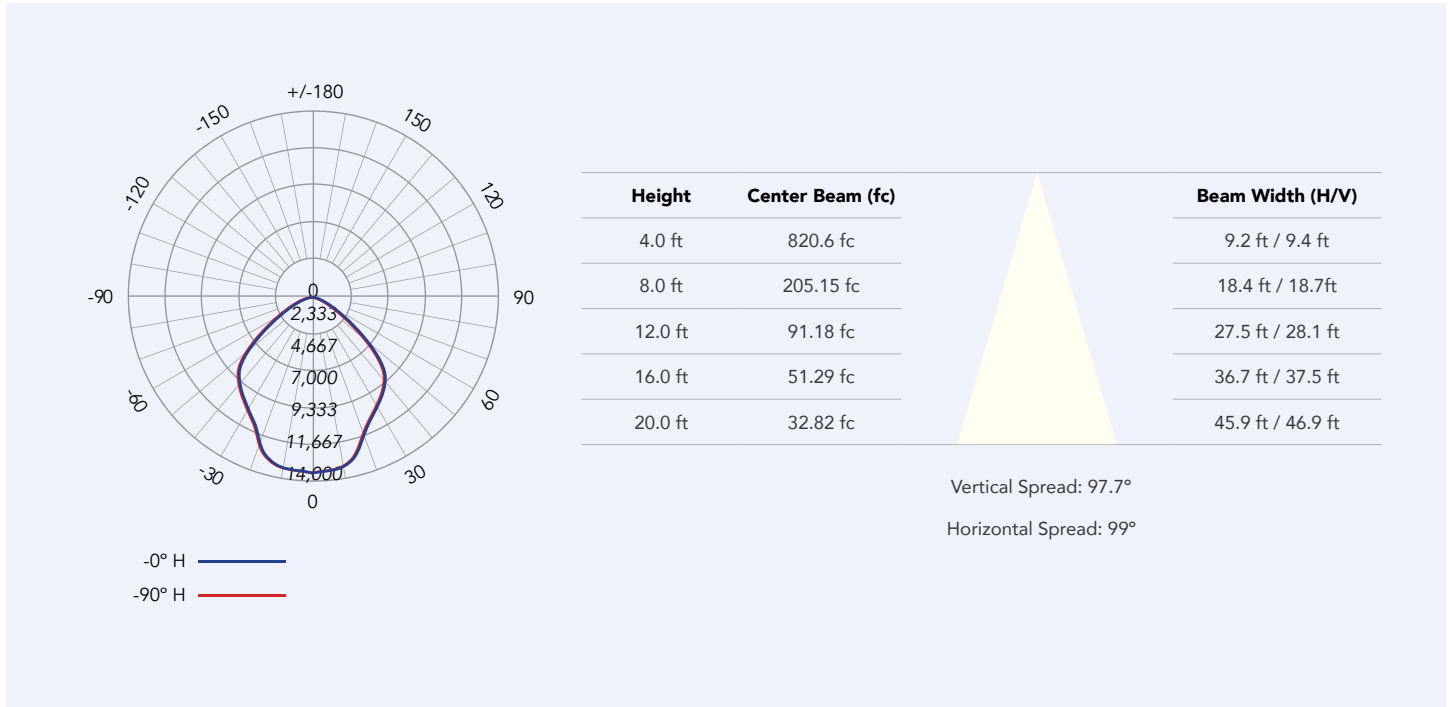


Light Distribution (R34231, R34232)

Wattage	3500K				4000K				5000K			
	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy
80W	14,518 lm	15,142 lm	14,743 lm	189 lm/W	15,283 lm	15,816 lm	15,611 lm	197 lm/W	16,053 lm	16,053 lm	15,561 lm	200 lm/W
100W	17,484 lm	18,022 lm	17,709 lm	180 lm/W	18,341 lm	19,160 lm	18,875 lm	191 lm/W	19,372 lm	19,372 lm	18,670 lm	194 lm/W
120W	20,149 lm	21,041 lm	20,592 lm	175 lm/W	21,129 lm	22,462 lm	21,898 lm	187 lm/W	21,194 lm	22,570 lm	21,412 lm	188 lm/W
160W	24,326 lm	25,671 lm	24,671 lm	160 lm/W	26,084 lm	27,724 lm	26,867 lm	173 lm/W	25,803 lm	25,803 lm	27,883 lm	174 lm/W

Photometrics R2

250W 5000K 90° Beam angle

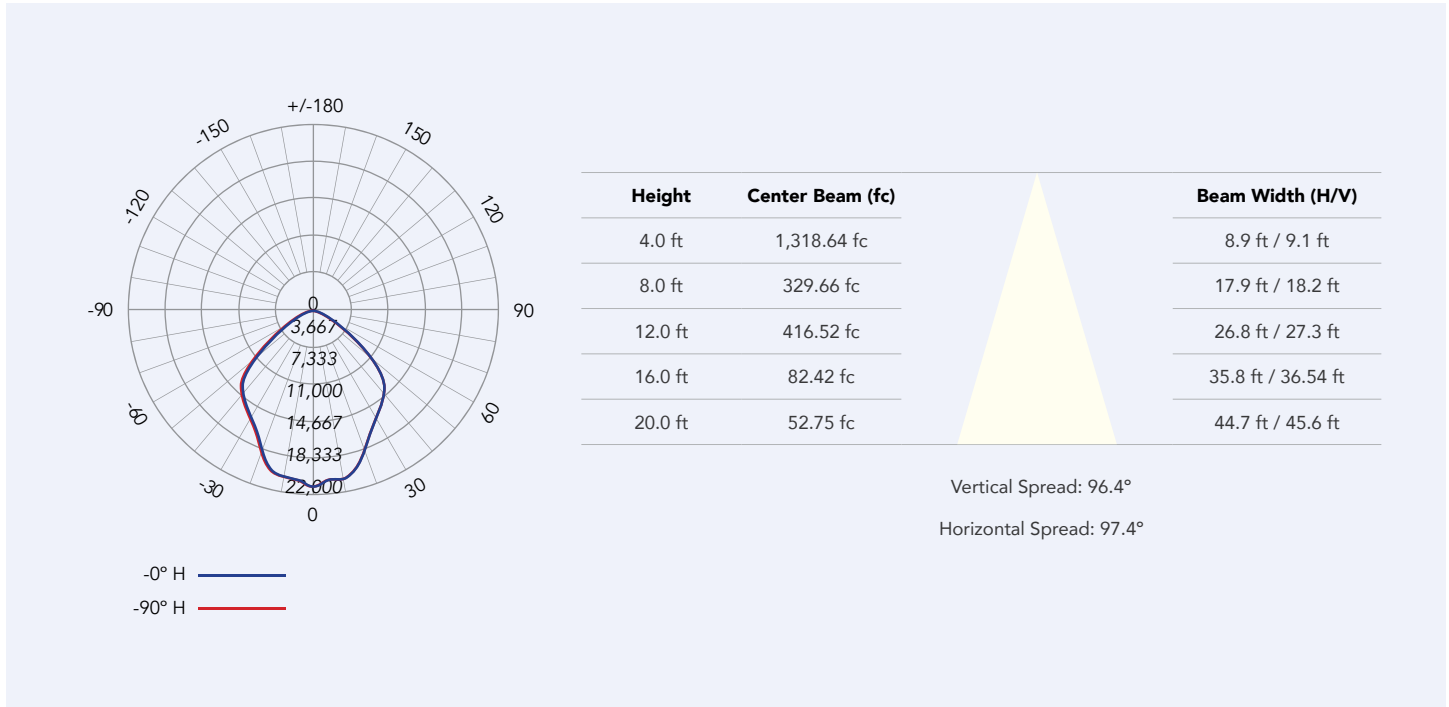


Light Distribution (R34233, R34234)

Wattage	3500K				4000K				5000K			
	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy
120W	22,032 lm	22,744 lm	27,737 lm	189 lm/W	23,006 lm	23,789 lm	23,639 lm	198 lm/W	22,784 lm	24,037 lm	23,502 lm	200 lm/W
160W	27,548 lm	28,640 lm	28,468 lm	179 lm/W	28,783 lm	30,101 lm	29,755 lm	188 lm/W	28,411 lm	30,275 lm	29,295 lm	189 lm/W
200W	33,512 lm	35,051 lm	34,690 lm	175 lm/W	35,220 lm	37,201 lm	36,501 lm	186 lm/W	34,717 lm	37,291 lm	35,565 lm	186 lm/W
250W	39,879 lm	42,033 lm	41,683 lm	168 lm/W	41,433 lm	43,998 lm	42,658 lm	175 lm/W	40,148 lm	43,768 lm	41,696 lm	175 lm/W

Photometrics R3

320W 5000K 90° Beam angle

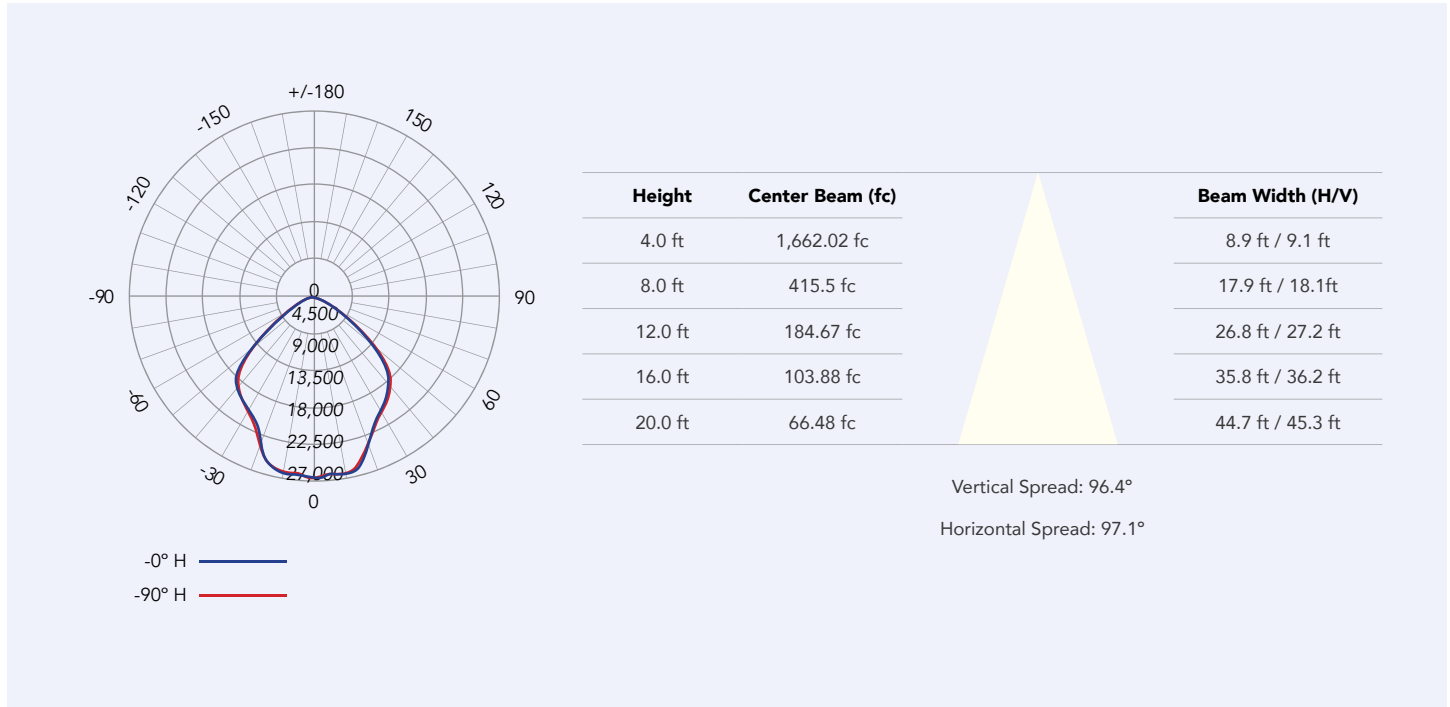

Light Distribution (R34235)

Wattage	3500K				4000K				5000K			
	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy	60°	90°	120°	Efficacy
250W	40,131 lm	41,257 lm	41,419 lm	165 lm/W	41,530 lm	43,867 lm	42,995 lm	175 lm/W	42,740 lm	46,166 lm	44,210 lm	184 lm/W
280W	44,278 lm	45,829 lm	45,766 lm	164 lm/W	45,724 lm	48,656 lm	47,308 lm	174 lm/W	46,857 lm	50,972 lm	48,444 lm	182 lm/W
300W	46,861 lm	48,732 lm	48,575 lm	162 lm/W	48,059 lm	51,553 lm	50,027 lm	172 lm/W	49,535 lm	53,800 lm	50,973 lm	179 lm/W
320W	48,912 lm	50,814 lm	50,655 lm	159 lm/W	50,704 lm	53,860 lm	52,286 lm	168 lm/W	51,471 lm	56,039 lm	53,223 lm	175 lm/W

Accessories

Cover & Mounting



R39601
RENO-HBU-COVER-R1/R2
PC Reflector Lens for R1/R2
UFO Highbay



R39603
RENO-HBU-COVER-R3/R4
PC Reflector Lens for R3/R5
UFO Highbay



R39602
RENO-HBU-BOTTOM-R1/R2
PC Reflector bottom cover for
R1/R2 UFO Highbay



R39605
RENO-HBU-BOTTOM-R3/R4
PC Reflector bottom cover for
R3/R4 UFO Highbay



R34601
RENO-UFO-YK
Yoke Mount for UFO Highbay

Specifications

Order #	Model #	Version	Type	Description
R39601	RENO-HBU-COVER-R1/R2	R1/R2	Reflector Lens	PC Reflector Lens for R1/R2 UFO HIGHBAY
R39603	RENO-HBU-COVER-R3/R4	R3/R4	Reflector Lens	PC Reflector Lens for R3 UFO HIGHBAY
R39602	RENO-HBU-BOTTOM-R1/R2	R1/R2	Bottom cover	PC Reflector bottom cover for R1/R2 UFO HIGHBAY
R39605	RENO-HBU-BOTTOM-R3/R4	R3/R4	Bottom cover	PC Reflector bottom cover for R3 UFO HIGHBAY
R34601	RENO-UFO-YK	All	Yoke mount	Yoke Mount for UFO HIGHBAY

Accessories

RENO Smart NLC




R75001
RENO-RS-JK-BPDN-12V
Bluetooth 3.5mm Jack PIR
Sensor (RENO Smart)




R75002
RENO-RS-JK-BMWM-12V
Bluetooth 3.5mm Jack
Microwave Sensor (RENO Smart)



R75201
RENO-RS-GW-BCNW
Ceiling Mounted Gateway
(RENO Smart)

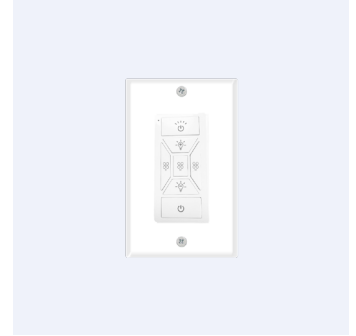

R75302
RENO-RS-RC-BNNG
7-Key Smart Wall Switch
(RENO Smart)



R75301
RENO-RS-RC-BNND
5-Key Reset Remote Controller
(RENO Smart)

Specifications

Order #	Model #	Type	Description
R75001	RENO-RS-JK-BPDN-12V	PIR	Bluetooth 3.5mm Jack PIR Sensor for RENO Smart NLC System
R75002	RENO-RS-JK-BMWM-12V	Microwave	Bluetooth 3.5mm Jack Microwave Sensor for RENO Smart NLC System
R75201	RENO-RS-RC-BCNW	Gateway	Ceiling Mounted Gateway for RENO Smart NLC System
R75302	RENO-RS-RC-BNNG	Wall Switch	7-Key Smart Wall Switch for RENO Smart NLC System
R75301	RENO-RS-RC-BNND	Remote	5-Key Reset Remote Controller

Accessories

Standalone Sensors & Remotes



R71002
RENO-SENSOR-MW-H
Bi-level dim sensor for linear Highbays



R74004
RENO-SENSOR-PIR3.5-PH15M
Long Detection Range PIR Sensor



R73002
RENO-REMOTE-H
Remote Control for Standalone Sensors (With Screen)



R73005
RENO-REMOTE-H-ECO
Remote Control for Standalone sensors (Without Screen)

Specifications

Order #	Model #	Type	Description
R71002	RENO-SENSOR-MW-H	Microwave	Bi-level dim sensor for linear Highbays
R74004	RENO-SENSOR-PIR3.5_PH15M	PIR	Long Detection Range PIR Sensor
R73002	RENO-REMOTE-H	Remote	Remote Control for Standalone Sensors With Screen (Only 1 needed per project.)
R73005	RENO-REMOTE-H-ECO	Remote	Remote Control for Standalone sensors without Screen (Only 1 needed per project)

Accessories

Emergency LED Drivers




R83005
 RENO-EM-40RM
 Emergency LED Driver
 (100-347V AC, 50-60 Hz, 40W)

Specifications

Order #	Model #	Wattage	Description
R83005	RENO-EM-40RM	25W	Emergency LED Driver (100-347V, 50-60Hz, 40W)

Dimensions

UFO Highbay

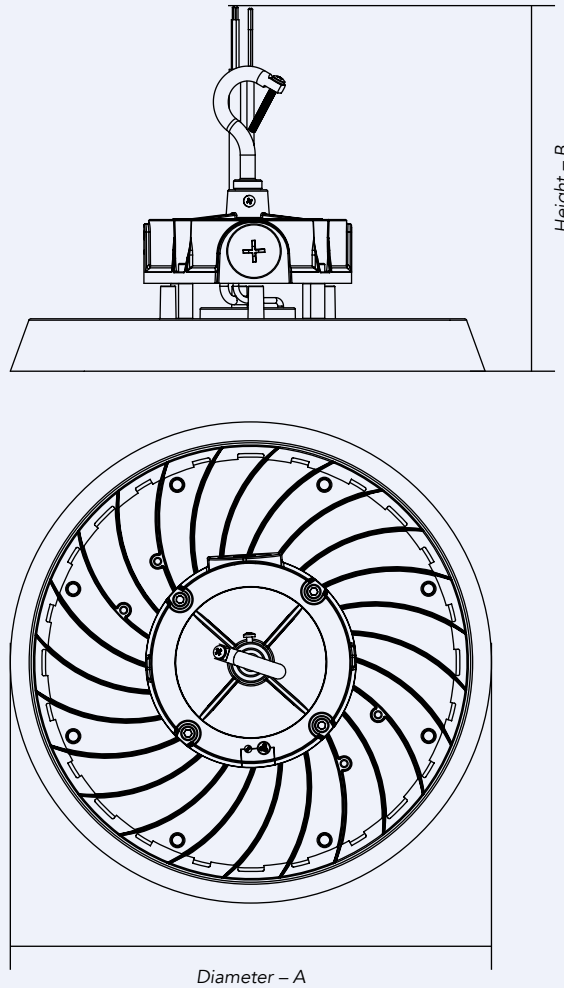

	R1	R2	R3
Diameter - A	Ø 11.52" Ø 292.59 mm	Ø 11.52" Ø 292.59 mm	Ø 13.19" Ø 335 mm
Height - B	8.12" 206.14 mm	8.12" 206.14 mm	8.47" 215.26 mm
Weight	4.63 lbs 2.1 kg	5.62 lbs 2.55 kg	7.85 lbs 3.56 kg