

# KEYSTONE Wall Pack

20W / 30W / 40W | 3000K | 120-347V

Suitable for use in commercial and industrial building projects needing a sleek, customizable luminaire that enhances building aesthetics.

PRODUCT CODES: KWP-40W-3P-3CCT-UD-BK, KWP-40W-3P-3CCT-UD-BZ, KWP-40W-3P-3CCT-UD-WH



Power Selectable

20W / 30W / 40W

120-347V Universal Driver

0-10V dimming

Available in Black (BK),  
Bronze (BZ), and White (WH)

Built-in Photocell

unplug to bypass

Type II Optics Standard

Type III and Type IV  
Interchangeable Optics  
sold separately

Motion Sensor Compatible

sold separately

DarkSky Approved

when set to 3000K operation



## TECHNICAL DATA



**DARKSKY APPROVED**  
Reduces light pollution  
Certified by DarkSky.org



### LIGHT SPECIFICATIONS

Efficacy	152 lm/W
CCT	3000K
CRI	>80
Distribution	Type II
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	40W   4000K

LUMEN OUTPUT	
	3000K
20W	3649 lm
30W	5417 lm
40W	6075 lm


### APPROVALS & LISTINGS

cUL	E482965
-----	---------

### DIMENSIONS AND WEIGHTS

Fixture Weight	3.7 lbs
Fixture Dimensions	10.65 x 9.36 x 6.85 in
Carton Qty	1
Carton Weight	6.38 lbs
Carton Dimensions	12 x 10.3 x 7.8 in

### DIMENSIONAL DRAWINGS (IN)

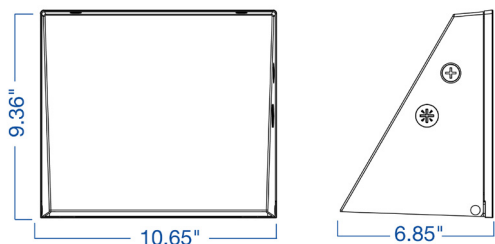

### ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Current	0.4A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

### CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	Black / Bronze / White
IP Rating	IP65

### ACCESSORIES (Sold Separately)

Infrared Motion Sensor	MS01-PIR-TW-DC
Microwave Motion Sensor	MS04-MW-TW-DC
Type III Optics	KWP-TYPE-III-SM
Type IV Optics	KWP-TYPE-IV-SM
Motion Sensor Remote	MS04-RC

**NOTE: MS04-RC is required** for Microwave and Infrared Motion Sensors to function