

KEYSTONE Wall Pack

40W / 60W / 80W | 3000K | 120-347V

Suitable for use in commercial and industrial building projects needing a sleek, customizable luminaire that enhances building aesthetics.

PRODUCT CODES: KWP-80W-3P-3CCT-UD-BK, KWP-80W-3P-3CCT-UD-BZ, KWP-80W-3P-3CCT-UD-WH



Power Selectable

40W / 60W / 80W

120-347V Universal Driver

0-10V dimming

Available in Black (BK),
Bronze (BZ), and White (WH)

Built-in Photocell

unplug to bypass

Type II Optics Standard

Type III and Type IV
Interchangeable Optics
sold separately

Motion Sensor Compatible

sold separately

DarkSky Approved

when set to 3000K operation



TECHNICAL DATA



**DARKSKY
APPROVED**
Reduces light pollution
Certified by DarkSky.org



LIGHT SPECIFICATIONS

| | |
|------------------|-------------|
| Efficacy | 171 lm/W |
| CCT | 3000K |
| CRI | >80 |
| Distribution | Type II |
| Dimmable | 0-10V |
| L70 Life | 50,000 hrs |
| Warranty | 10-year |
| Factory Settings | 80W 4000K |

| LUMEN OUTPUT | |
|--------------|----------|
| | 3000K |
| 40W | 7650 lm |
| 60W | 10817 lm |
| 80W | 13654 lm |


APPROVALS & LISTINGS

| | |
|-----|---------|
| cUL | E482965 |
|-----|---------|

DIMENSIONS AND WEIGHTS

| | |
|--------------------|------------------------|
| Fixture Weight | 5.28 lbs |
| Fixture Dimensions | 13.28 x 9.36 x 8.11 in |
| Carton Qty | 1 |
| Carton Weight | 7.92 lbs |
| Carton Dimensions | 14.7 x 10.3 x 9.1 in |

DIMENSIONAL DRAWINGS (IN)

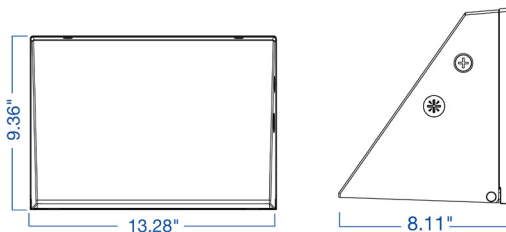

ELECTRICAL

| | |
|------------------------------|-------------|
| Wattage | 40W/60W/80W |
| Voltage | 120-347V |
| Current | 0.8A |
| Surge Protection | 6kV |
| Auxiliary Output | 12V |
| Power Factor | 0.9 |
| THD | 15% |
| Operating Temp | -40 to 50°C |
| Operating Temp (with Sensor) | -25 to 50°C |

CONSTRUCTION

| | |
|---------------|------------------------|
| Housing | Die-Cast Aluminum |
| Lens | Polycarbonate |
| Finish | Powder Coated |
| Finish Colour | Black / Bronze / White |
| IP Rating | IP65 |

ACCESSORIES* (Sold Separately)

| | |
|-------------------------|-----------------|
| Infrared Motion Sensor | MS01-PIR-TW-DC |
| Microwave Motion Sensor | MS04-MW-TW-DC |
| Type III Optics | KWP-TYPE-III-LG |
| Type IV Optics | KWP-TYPE-IV-LG |
| Motion Sensor Remote | MS04-RC |

NOTE: MS04-RC is required for Microwave and Infrared Motion Sensors to function