

Technical Information Bulletin

Design LED Filament Lamps




Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67747
Description: A19/S3/7W/30K/S/FIL/STD
UPC: 69549677456
Case quantity: 10 / 40

PHYSICAL DATA

Shape: A19
Base: E26
Finish: Half-Mirror
Filament type: Oblique

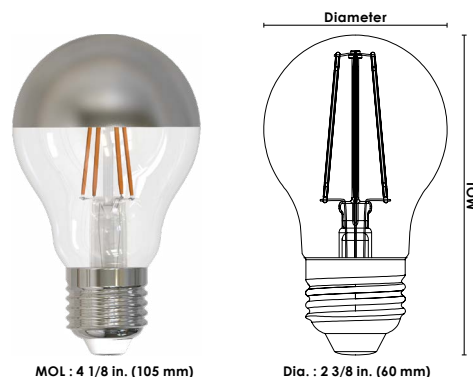

PERFORMANCE DATA

Watts (W): 4.5
Volts (VAC): 120
Colour temp. (K)¹: 3 000
Lumen output (lm)²: 380
Lumen per Watts (lm/W): 84
Traditional equivalent (W): 25
CRI: 80
Life L70 (h): 15 000
Beam angle (°): 300
Power factor: 0.9
Frequency (Hz): 60
Dimming: Forward
Burning position: Universal
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %
² Initial lumens range: +/- 5 %

COMPATIBLE DIMMERS

BRAND	MODEL
COOPER	RRD-6NA, SLC03P,
LEGRAND	RH703PTUTC
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	PD-5NE, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P

* Slight flicker might occur on low intensity with some dimmers



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

April 27, 2020