

Installation Instruction





LED Surface Discus

Applicable models:
RGD-HS/16 (16"), RGD-HS/24 (24")




- WARNING : RISK OF SHOCK** House electric current can cause painful shock or serious injury unless handled properly. For your safety, always remember to :
 - Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
 - Double-check all connections to be sure they are tight and correct.
- This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.
- WARNING : RISK OF CUTS** Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Terminal block and the suspending accessories is not included. Installation must be performed by a qualified person.


Wattage (W)	Voltage (V)	Rated Input Frequency (Hz)	Beam Angle (°)	Dimension (DxH)
30W	AC120V	60Hz	120	16 x 0.95 inch
48W				24 x 0.95 inch

Surface Mounted Installation (Supplied with Fixture)

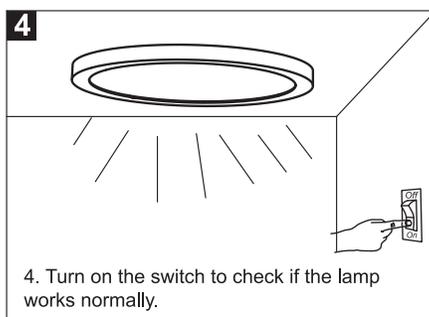
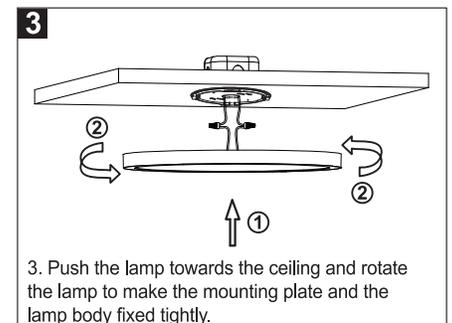
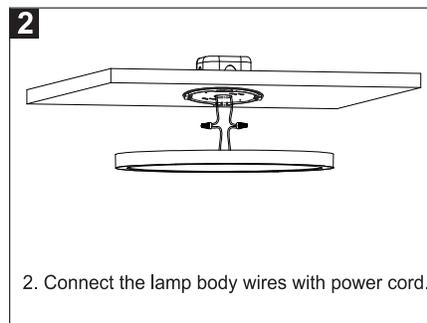
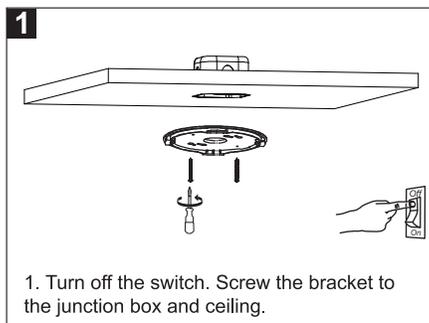


Semi-Flush Mounted Installation (Ordered separately)

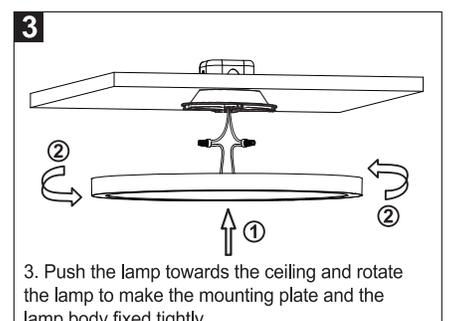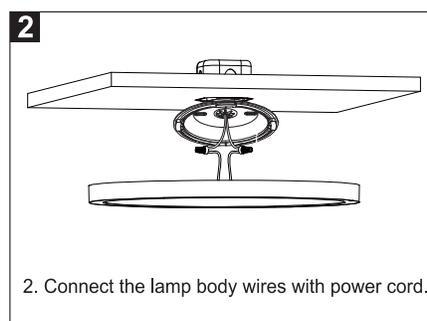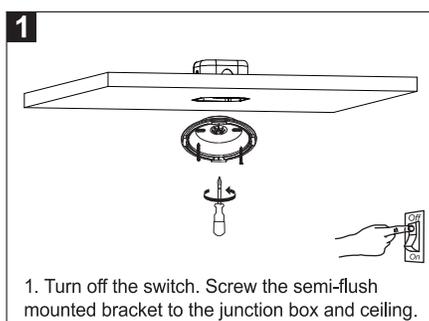

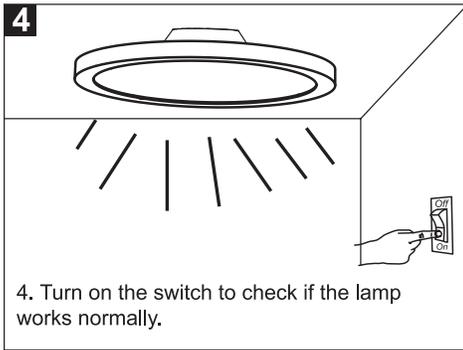

Suspending Installation (Ordered separately)

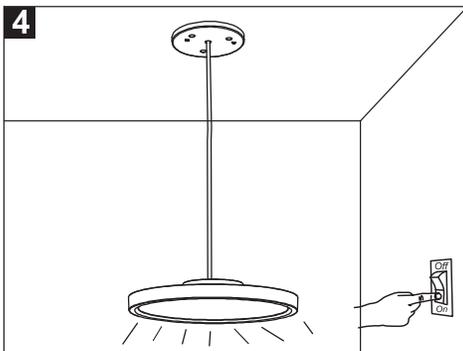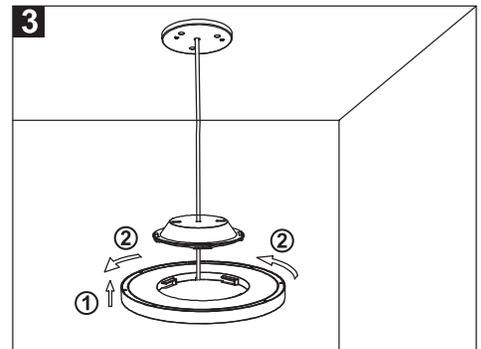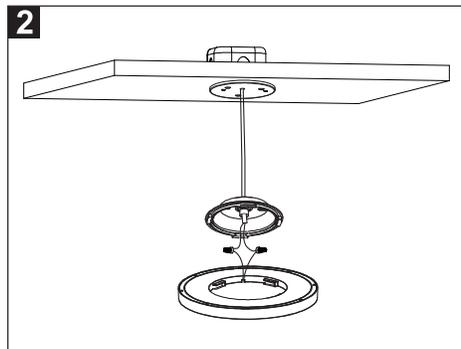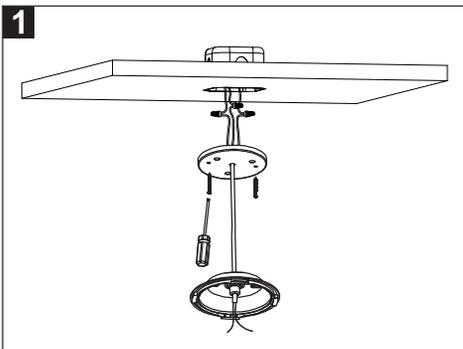

Caution

1. WARNING : Risk of fire.
2. Before installing your lighting fixture, thoroughly review enclosed installation manual. If you do not have sufficient electrical wiring experience, please refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician. All electrical connections must be in accordance with local standards. Reliable operating temperature is -20 to +40 degrees
3. pls obey fire prevention regulations, do not cover the fixture with any heat insulated materials.
4. Do not change the LED light source or driver inside under any circumstance.

Warranty:
5 years warranty



This product
is for indoor
use only



For use
with
dimmers