



ODYSSEY LED FLUSH MOUNT

HIGHLIGHTS

- A decorative mushroom style fixture ideal for use in a variety of residential and commercial applications
- Durable, lightweight alternative to glass
- PowerSET feature allows for multiple light levels out of the box
- FieldCCeT feature provides multiple color temperature settings in one fixture
- Model with integrated motion sensor is available
- Available in 3 sizes: 11", 13", and 15"

CERTIFICATIONS

- ETL listed for US & Canada
- RoHS Compliant
- FCC Compliant
- Damp Location Rated

PERFORMANCE

- PowerSET – 3 Power settings
 - 11" – 16/14/12W
 - 13" – 22/18/15W
 - 15" – 24/21/18W
- Motion sensor model available in 22W only
- FieldCCeT – 5 CCT settings (2700/3000/3500/4000/5000K)
- CRI: >80
- Efficacy up to 85 LPW
- Lumen Maintenance 70% (L70): 50,000 Hours

ELECTRICAL

- Input voltage: 120V
- Surge protection: 2.5kV
- Power factor: ≥0.9
- THD: <20%
- Triac dimming for standard models (no sensor)

THERMAL

- 4°F to 104°F (-20°C to 40°C) ambient operating temperature

CONSTRUCTION

- Aluminum construction
- Frosted plastic lens

WARRANTY

- 5-Year limited warranty available [online](#). Contact your EiKO sales rep for additional details.

project name	type
catalog number	voltage
approved by	date



APPLICATIONS


- Hotel Lobby
- Shopping Center
- Closet
- Recreation Center
- Public Area
- Corridor
- Office
- School
- Hospitality
- Retail

AVAILABLE MODELS

ORDER	ORDER CODE	ITEM #	SIZE	WATTS (W)	LUMENS (lm)	CRI	CCT (K)	VOLTAGE (V)
	15635	FMODY-11-PS16-8FCCT-D	11"	16/14/12	1,360/1,190/1,020	80+	2700/3000/3500/4000/5000	120
	15636	FMODY-13-PS22-8FCCT-D	13"	22/18/15	1,870/1,530/1,280	80+		
	15637	FMODY-15-PS24-8FCCT-D	15"	24/21/18	2,040/1,785/1,530	80+		
With Motion Sensor								
	15844	FMODY-13-22W-8FCCT-MS	13"	22	1,870	80+	2700/3000/3500/4000/5000	120

MODEL CONFIGURATOR							
MODEL	SIZE	-	WATTS	-	CCT	-	VOLTAGE
FMODY		-		-	8FCCT	-	
FMODY	11 - 11 in 13 - 13 in 15 - 15 in		PS16 - 16/14/12 PS22 - 22/18/15 PS24 - 24/21/18 22W - 22 (Motion Sensor Model)		8FCCT – 80+ CRI, Field Color Selectable (2700/3000/3500/4000/5000)		D - Dimming MS - Motion Sensor (non-dimming)

PRODUCT DIMENSIONS

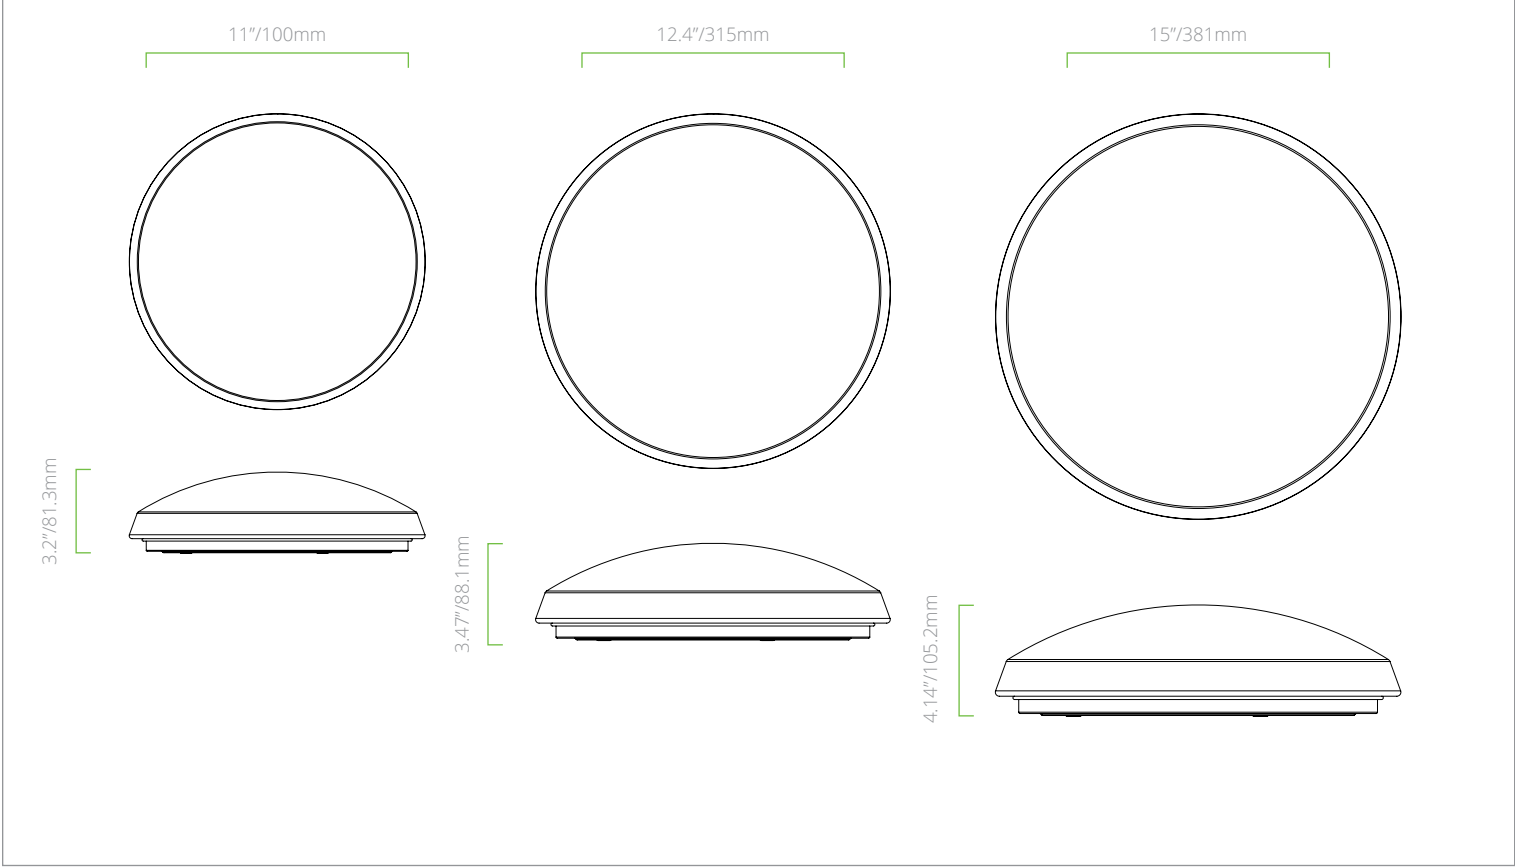

SENSOR DETECTION RANGE

