

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

LOW VOLTAGE LED TAPE

1.5 W, 12 V - IP22

ORDERING INFORMATION

Order code: 65880
Description: TAPE/16.4'/1.5W/40K/12V/IP22/60/8MM/STD
UPC: 069549658806
Case quantity: 25

PHYSICAL DATA

Reel Total Length: 16.4 ft. (5 m)
Jacketed or Unjacketed: Unjacketed
Wire gauge: 22 AWG
Number of LEDs: 60 LEDs per meter
18 LEDs per foot
Cuttable length: 2 in. (50 mm) or every 3 LED chips
Maximum run length: 33 ft. (10 m)
Operating Temperature: -25°C / -13°F to 40°C / 104°F

PERFORMANCE DATA

Volts (V DC): 12
Color temperature (K): 4 000 (Cool white)
Watts per length: 24 W per reel
4.8 W per meter
0.12 W per inch
Light output per length: 2 025 lm per reel
405 lm per meter
10 lm per inch
Efficacy (lm/W): 84
CRI: 90+
Life (hrs): 50 000
Beam angle (°): 120

¹ Typical Color temperature range: +/- 5 %² Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold separately).
Custom lengths available upon request. Ask your sales representative for more information.




3^{yrs}
warranty


**dimmmable
fixture**


**dry
location**



DIMENSIONS

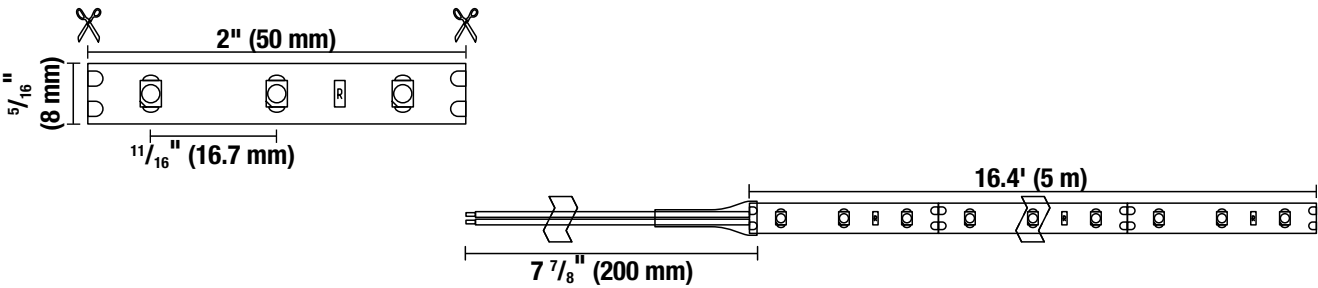

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.