

Technical Information Bulletin


CHOICE LED Lamps



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67966
 Description: A19/S2/9W/27K/ND/CHOICE/STD
 UPC: 069549679665
 Case quantity: 1 / 100

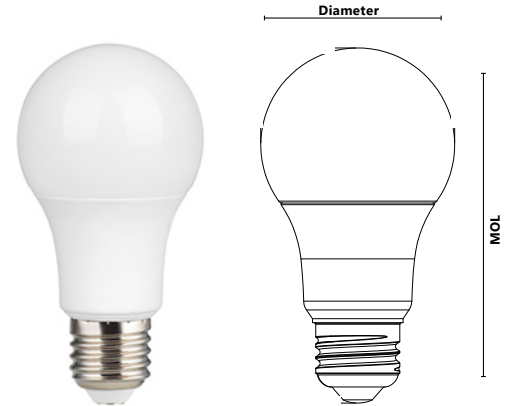

MOL : 4 1/4 in. (108 mm)

Dia. : 2 3/8 in. (60 mm)

PERFORMANCE DATA

Shape: A19
 Wattage (W): 9
 Base: E26
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 2700
 Life L70 (hrs): 15 000
 Initial lumens (lm)*: 800
 Initial lumens per watt (lm/W): 89
 CRI: 80
 Beam angle (°): 180
 Power factor: 0.70
 Operating temperature range: -20 °C / -4 °F to 40 °C / 104 °F

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Not suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- NON-Dimmable
- Operating temperature: -20°C / -4°F to 40 °C / 104 °F.
- 2 Years Limited Warranty.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.