

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

DECORATIVE LED LAMPS

Filaments

ORDERING INFORMATION

Order code: 68948
Model number: G25/S3/4.5W/30K/O/FIL/STD
UPC: 069549022744
Case quantity: 10 / 40

PHYSICAL DATA

Shape: G25
Base: E26
Finish: Clear
Filament Type: Oblique

PERFORMANCE DATA

Watts (W): 4.5
Volts (VAC): 120
Color temperature (K): 3 000
Lumen output (lm): 450
Efficacy (lm/W): 100
Traditional equivalent (W): 40
CRI: 80
Life L70 (h): 15 000
Beam angle (°): 320°
Power factor (%): 0.7
Frequency (Hz): 60
Dimming: Forward
Burning position: Universal
Operating temp. range: -20°C to 40°C / -4°F to 104°F

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	AYCL-253P, CTCL-153P, DVCL-253P, DVRP-253P, MACL-153P, PD-5NE, SELV-300P
COOPER	RRD-6NA
LEVITON	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
LEGRAND	RH703PTUTC

Dimming range: 10%-100%

¹This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.



2 yrs
warranty


dimmable


damp
location


enclosed
fixture

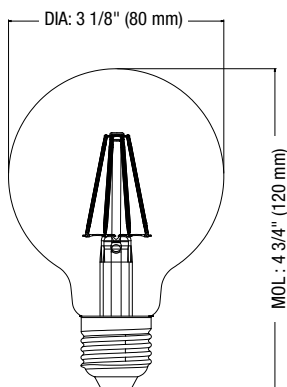

ICES
005





This lighting equipment meets requirements of ICES-005 issue class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.