

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# WAY

## LED STEP LIGHTS

### ORDERING INFORMATION

**Order code:** 69750  
**Model number:** ASWA-V-3W-A-30BK  
**UPC:** 069549029712  
**Case quantity:** 18

### PHYSICAL DATA

**Size in. (cm):** 3 (7.7) x 5 (12.7)  
**Lens material:** Acrylic lens with frosted finish  
**Housing material:** Durable die-cast aluminum housing  
**Housing finish:** Black  
**Mounting:** Recessed wall-mounted, vertical  
**Daisy chain:** Up to 20 fixtures

### PERFORMANCE DATA

**Watts (W):** 3  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 3 000  
**Initial lumen output (lm)<sup>2</sup>:** 85  
**Efficacy (lm/W)<sup>3</sup>:** 28  
**CRI:** 90+  
**Life L70 (h)<sup>4</sup>:** 50 000  
**Dimming:** Phase cut (ELV / Triac)  
**Power factor:** ≥0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -30 °C to 40 °C (-22 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Total lumen values. Lumen range: +/- 10%.

<sup>3</sup> Efficacy is derived from initial lumen output value.

<sup>4</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
COOPER	DAL06P, AAL06
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	HCL453P, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, DVELV-300P, SELV-300P, MACL-153P

#### DIMMING RANGE: 5%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



quick  
ship



LED  
fixture



dimmmable



wet  
location




ICES  
005




Intertek

DIMENSIONS AND WEIGHT

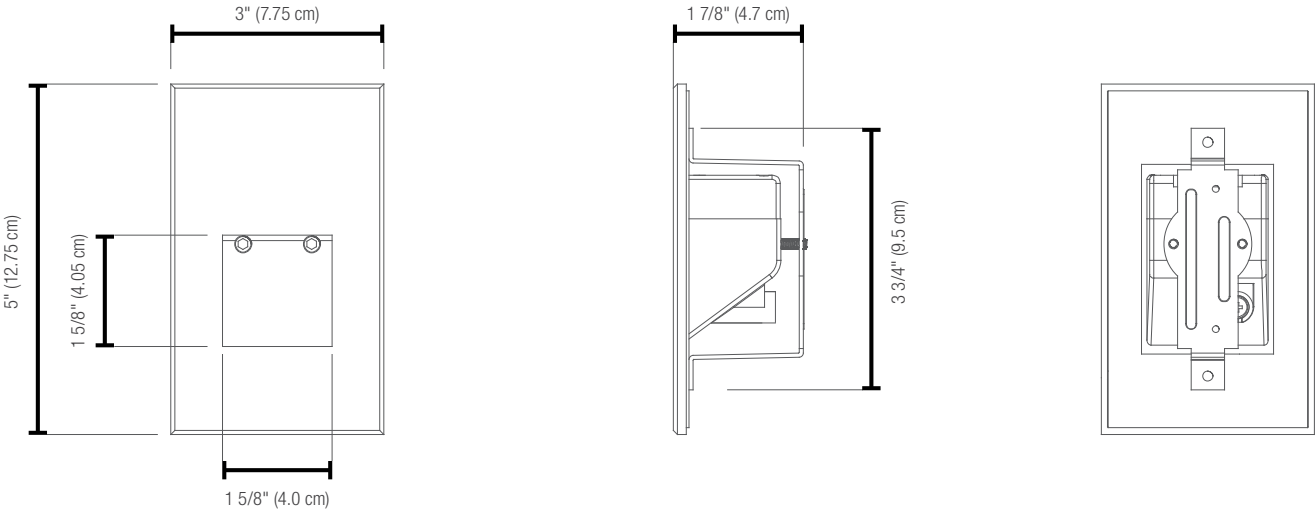


Net weight (lbs)	0.46
------------------	------

SPACING RECOMMENDATION<sup>1</sup>

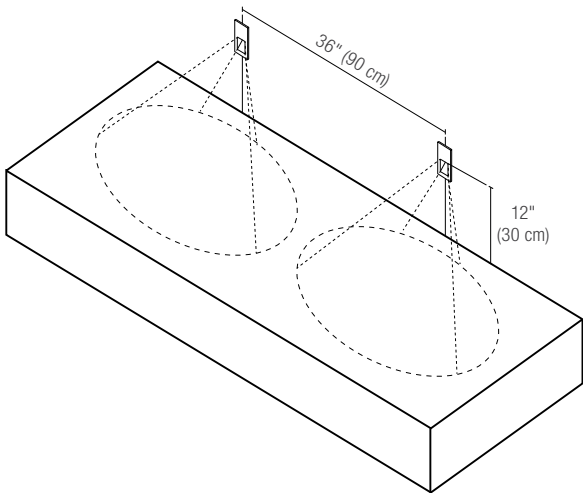

<sup>1</sup> Drawing is for reference only. Spot light model may vary.

LIGHT SPREAD

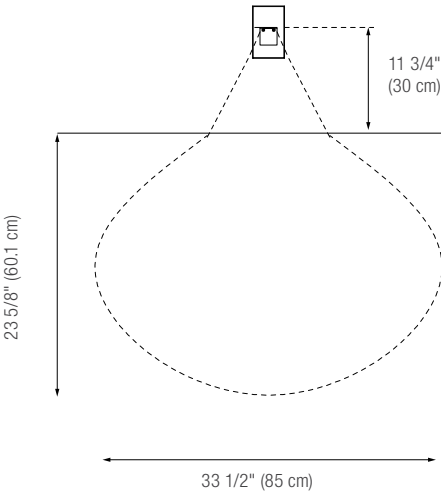

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.