

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L3CTG

T-GRID LED LINEAR LIGHT

ORDERING INFORMATION

Order Code: 68025
Model Number: L3CTG-0215LS1/35K
UPC: 069549013599
Case Quantity: 18

PHYSICAL DATA

Size in. (mm): 24" (609.6 mm)
Width in. 15/16
Type: Linear
Lens Material: Frosted acrylic lens
Frame Material: Aluminum

PERFORMANCE DATA

Watts (W): 10
Colour Temp. (K)¹: 3 500
Lumen Output (lm)²: 1 300
Lumen per Watts (lm/W): 130
CRI: 80+
Dimming: 0-10 V
Life L70 (h)³: 50 000
THD (%): 20
Power Factor: 0.9
Frequency (Hz): 60
Input Current (A): 0.28
Output Current (mA): 280
Cables Rating: FT6

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

COMPATIBLE DRIVER (SOLD SEPARATELY)

Order code	Model number	Type
68029	PSTG30W	LED Driver



5
yrs
warranty

**quick
ship**

**LED
fixture**

**damp
location**

dimmable

**IC
rated**



**ICES
005**




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS¹

Brand	Model number
Lutron	DIVA-DVTV NOVA-NTSTV-TV


¹ Dimming range : 10%-100%

DIMENSIONS

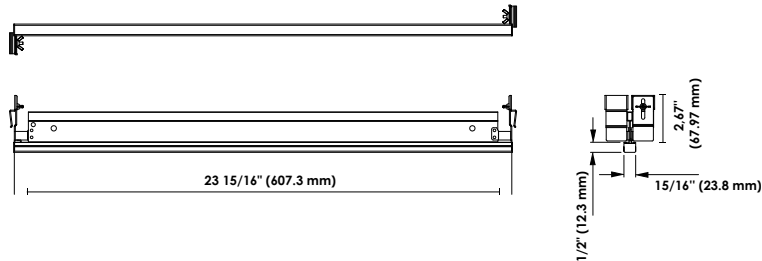PHOTOMETRIC DATA¹

68025 • L3CTG-0215LS1/35K • 1 259.2 lm

Polar candela distribution

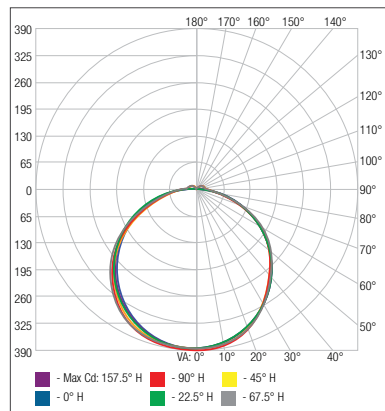

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	304.9	24.2
0-40	503.5	40
0-60	907.2	72
60-90	283.7	22.5
70-100	146.7	11.6
90-120	42.9	3.4
0-90	1 190.9	94.6
90-180	68.3	5.4
0-180	1 259.2	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	133	5.5'	5.8'
3.3'	35.4	10.7'	11.3'
5.0'	15.4	16.2'	17.1'
6.7'	8.59	21.7'	22.9'
8.3'	5.60	26.9'	28.4'
10.0'	3.86	32.4'	34.3'

■ Vert. spread: 116.7°
■ Horiz. spread: 119.4°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.