

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L3CTG

T-GRID LED LINEAR LIGHT

ORDERING INFORMATION

Order Code: 68028
Model Number: L3CTG-0415LS2/35K
UPC: 069549013629
Case Quantity: 18

PHYSICAL DATA

Size in. (mm): 48" (1 219.2 mm)
Width in. 15/16
Type: Linear
Lens Material: Frosted acrylic lens
Frame Material: Aluminum

PERFORMANCE DATA

Watts (W): 20
Colour Temp. (K)¹: 4 000
Lumen Output (lm)²: 2 600
Lumen per Watts (lm/W): 130
CRI: 80+
Dimming: 0-10 V
Life L70 (h)³: 50 000
THD (%): 20
Power Factor: 0.9
Frequency (Hz): 60
Input Current (A): 0.5
Output Current (mA): 500
Cables Rating: FT6

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

COMPATIBLE DRIVER (SOLD SEPARATELY)

Order code	Model number	Type
68030	PSTG60W	LED Driver



5
yrs
warranty

**quick
ship**

**LED
fixture**

**damp
location**

dimable

**IC
rated**



**ICES
005**




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS¹

Brand	Model number
Lutron	DIVA-DTVV NOVA-NTSTV-TV


¹ Dimming range : 10%-100%

DIMENSIONS

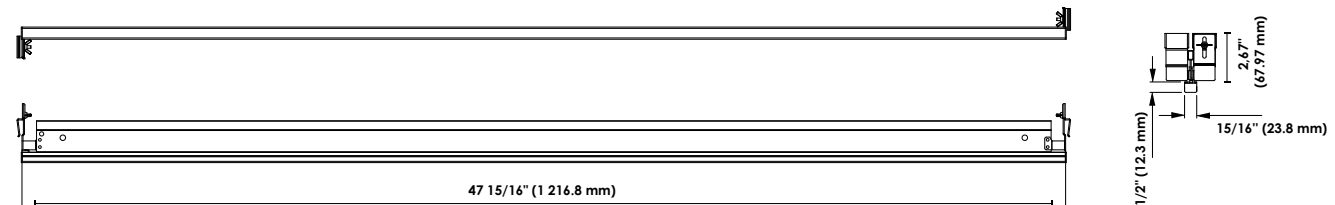PHOTOMETRIC DATA¹

68028 • L3CTG-0415LS2/40K • 2 668 lm

Polar candela distribution

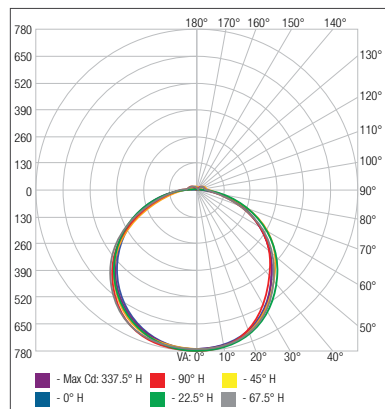

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	616.0	23.1
0-40	1 024.5	38.4
0-60	1 873.4	70.2
60-90	635.4	23.8
70-100	344.0	12.9
90-120	97.5	3.7
0-90	2 508.8	94
90-180	159.2	6
0-180	2 668.0	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	268	6.0'	6.0'
3.3'	71.1	11.6'	11.6'
5.0'	31.0	17.6'	17.6'
6.7'	17.2	23.6'	23.6'
8.3'	11.2	29.2'	29.2'
10.0'	7.74	35.2'	35.2'

Vert. spread: 120.8°
Horiz. spread: 120.8°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.